

Model NO. : SLL-12

All in one Solar Plaza Light 2000 Lumens

High quality/Efficiency/Energy Saving

Application: High way/Park/Street/Roadway/Parking

Lot/Public square/ plaza/Campus/Airfield/Farm &

Ranch/Remote Area/Military Base/Government

project for special use

Categories: [Solar plaza light](#)

[www.usaemergencysolarenergy.com](http://www.usaemergencysolarenergy.com) PH+1-303-634-2208

Fax: +1-303-634-2208 Email: [sales@usaemergencysolarenergy.com](mailto:sales@usaemergencysolarenergy.com)



[www.usaemergencysolarenergy.com](http://www.usaemergencysolarenergy.com) PH+1-303-634-2208  
Fax: +1-303-634-2208 Email:  
[sales@usaemergencysolarenergy.com](mailto:sales@usaemergencysolarenergy.com)

**Features:**  
 1. Smart Remote Control Function to satisfy different Customer use.  
 2. (ALS) Adaptive Lighting System to achieve all night lighting when Weather change. Constant current output!  
 3. VFT (Variable Frequency Technology) to Control and adjust the LED driver frequency to reach the max output of LED and Battery  
 4. TCS (Temperature Control System) to Protect the battery charging and discharging in high temperate  
 5. SSC LED chip, 160 lumen/W

price per unit	100 pcs Price			
<b>us\$255.12 BUY NOW</b>	<b>us\$225.12 BUY NOW</b>			

<b>LED</b>	<b>2000 Lumens 48 LEDs 5700- 6500K</b>
------------	--

<b>Lighting mode</b>
----------------------

Li-ion battery	115.4WH 14.8V
----------------	---------------

1. Constant Brightness all the time ( 100%/60%/30%/10%)
2. Timer lighting mode( 1H/2H/3H/4H/6H/8H, 6 options)
3. M1:30%(5H)+10%(7H)  
M2:40%(6H)

Solar Panel	18W 18V
-------------	---------

Install height	3~4 meters
----------------	------------

**Application:**  
 Courtyard/Garden/ Park/Street/Roadway/pathway/Parking Lot/Private road/Sidewalk/Public square/ plaza/Campus/Airfield/Farm & Ranch/Perimeter Security/ Wildlife area/Remote Area/Military Base

Waterproof	IP 65
------------	-------

Solar charging time	8~9 hours by bright sunlight
---------------------	------------------------------

<b>Lighting time</b>	<b>Over 3 nights</b>
----------------------	----------------------

**Packing details:**  
 Retail packaging: L56\*W21\*H56CM  
 Carton size: L58\*W44\*H58CM  
 QTY/CTNS: 2PCS  
 G.W/CTNS: 16 KG  
[www.usaemergency solarenergy.com](http://www.usaemergency solarenergy.com) PH+1-303-634-2208  
 Fax: +1-303-634-2208 Email: [sales@usaemergency solarenergy.com](mailto:sales@usaemergency solarenergy.com)

Material	Aluminum alloy + ABS
----------	----------------------

Size	526*163mm
------	-----------

Warranty	2 years
----------	---------



[www.usaemergencysolarenergy.com](http://www.usaemergencysolarenergy.com) PH+1-303-634-2208 Fax: +1-303-634-2208 Email: [sales@usaemergencysolarenergy.com](mailto:sales@usaemergencysolarenergy.com)



[www.usaemergencysolarenergy.com](http://www.usaemergencysolarenergy.com) PH+1-303-634-2208 Fax: +1-303-634-2208 Email: [sales@usaemergencysolarenergy.com](mailto:sales@usaemergencysolarenergy.com)

[www.usaemergencysolarenergy.com](http://www.usaemergencysolarenergy.com) PH+1-303-634-2208 Fax: +1-303-634-2208 Email: [sales@usaemergencysolarenergy.com](mailto:sales@usaemergencysolarenergy.com)



[www.usaemergencysolarenergy.com](http://www.usaemergencysolarenergy.com) PH+1-303-634-2208  
Fax: +1-303-634-2208 Email:  
[sales@usaemergencysolarenergy.com](mailto:sales@usaemergencysolarenergy.com)



## •PRODUCTS DETAIL

•

Main Features:

- 1.Design: Solar panel, Battery, LED panel are all in One Integrated Design
- 2.Solar panel: High efficiency Glass Lamination panel
- 3.LED: High quality LED 120 lumen/W
- 4.Battery : A graded Li-ion battery No.18650
- 5.PIR :Motion sensor distance over 7M
- 6.Waterproof: IP65

Material : Aluminum Alloy + Tempered Glass

[www.usaemergencysolarenergy.com](http://www.usaemergencysolarenergy.com) PH+1-303-634-2208


Fax: +1-303-634-2208 Email: [sales@usaemergencysolarenergy.com](mailto:sales@usaemergencysolarenergy.com)



## How's the light working?

[www.usaemergencysolarenergy.com](http://www.usaemergencysolarenergy.com) PH+1-303-634-2208 Fax: +1-303-634-2208 Email: [sales@usaemergencysolarenergy.com](mailto:sales@usaemergencysolarenergy.com)

Light switch off for sun charging in daytime.

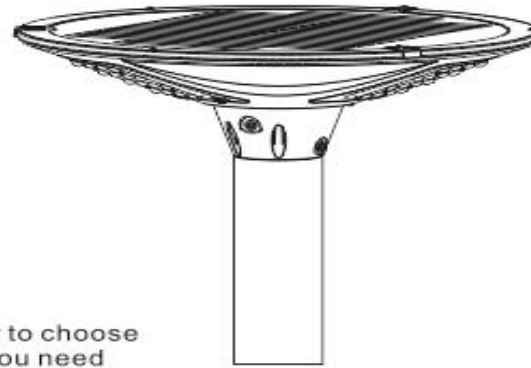

1. Use remote controller to choose below lighting mode you need  
Constant Brightness all the time  
(100%/60%/30%/10%)
2. Timer lighting mode(1H/2H/3H/  
4H/6H/8H,6 options)
3. M1:30%(5H)+10%(7H)  
M2:40%(6H)

